

INSTALLER



primador.co.za

Features

- All doors and windows are weatherproofed with quality vinyl seals and woolpile.
- Generally 4mm float glass is used for windows. When required by legislation, safety glass will be supplied.
- Safety glass is the standard installation used for doors.
- All Primador glass products comply with the following National Building Regulations: SANS 204, SANS 613, and Part N: Glazing. Our products have been tested for energy performance ratings, and SAFIRA certificates for energy and mechanical testing can be supplied upon request. As a member of the Association of Architectural Aluminium Manufacturers of South Africa (AAAMSA), we ensure that all our products conform to AAAMSA standards and specifications.



WINDOWS & DOORS




3464.kamino

30.5mm CASEMENT WINDOW Projected Out - TOP HUNG

width in millimeters

590 890 1190 1490 1790 2090 2390

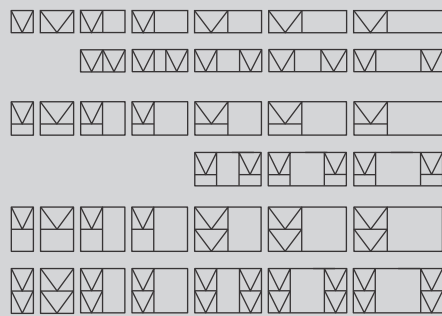


available in natural

powder coated: bronze
white
charcoal
other colours (on request)

width in millimeters


590 890 1190 1490 1790 2090 2390

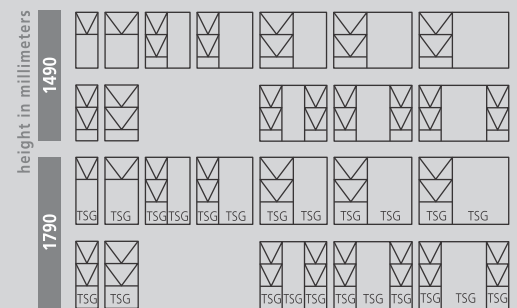

TSG = Toughened Safety Glass

width in millimeters

590 1190 1490 1790 2090 2390

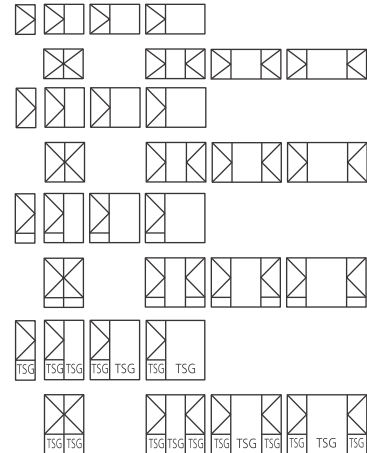

TSG = Toughened Safety Glass

Features (TOP HUNG & SIDE HUNG)

- Glazed with 4mm float clear or obscure glass, unless the size requires safety glass in accordance with regulations, then 4mm toughened safety glass or 6.38 laminated glass is used.
- Installed with fixing lugs supplied by Primador.
- Black handles supplied.

30.5mm CASEMENT WINDOW Projected Out - SIDE HUNG

available in natural

powder coated: bronze
white
charcoal
other colours (on request)



ELITE HORIZONTAL SLIDING Window

- Exclusive to Primador.
- Glazed with 4mm float clear or obscure glass, unless the size of the window requires safety glass in accordance with AAAMSA regulations.
- Both panels are sliding panels.
- Supplied with fitted handle.
- Non Return Valve installed in outer frame.
- Handle equipped with anti-theft bracket with a latch lock system.
- Can be installed with fixing lugs.




available in natural & powder coated: bronze

white
charcoal
other colours (on request)

width in millimeters

890 1190 1490 1790 2090 2390

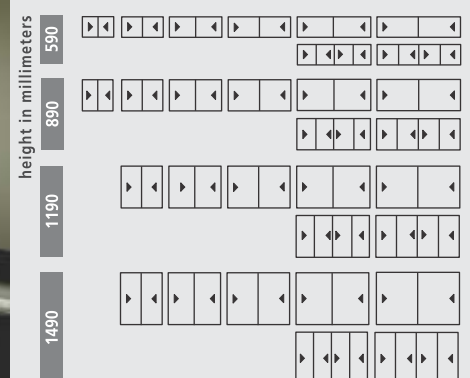

PATIO DOOR

all panels glazed with toughened safety glass



ALSO AVAILABLE AS PALACE DOORS

available in natural
powder coated: bronze | white | charcoal
other colours (on request)

O X TWO PANE

width	height
1490	2090
1790	
1990	
2090	
2390	
2690	
2990	



O X X THREE PANE

width	height
2690	2090
2990	
3590	
4190	
4490	



O X X O FOUR PANE

width	height
2990	2090
3590	
3990	
4190	
4790	
5390	
5990	



- All doors glazed with 5mm toughened safety glass and may be supplied with 6.38mm laminated glass upon request.
- Our doors are fully reversible. Which means it can open on the right or left hand side, i.e. OX or XO.
- Doors fitted with normal lever lock handles. Cylinder locks, night locks and night latches available upon request.
- Clip on side lights can be added.

FLY SCREENS

available in natural & powder coated: bronze | white | charcoal other colours (on request)

width (mm)
750
900
1000
1050
1200
1350
1500



width (mm)
2 of 750
2 of 900
2 of 1000
2 of 1050
2 of 1200
2 of 1350
2 of 1500



Flyscreens do not fit the normal patio head and cill frame. The patio door, supplied with flyscreens, will be supplied with the correct frame head and cill.

available in natural
powder coated: bronze | white | charcoal
other colours (on request)

ELITE SLIDING DOOR

all panels glazed with toughened safety glass

O X TWO PANE

width	height
1490	2090
1790	
2090	
2390	
2990	



O X X THREE PANE

width	height
2690	2090
2990	
3590	
4190	
4490	



O X X O FOUR PANE

width	height
2990	2090
3590	
4190	
4790	
5990	




ACCESSORIES CLIP ON TOP HUNG SIDE LIGHTS

width	height
600	2090
900	



when ordering **Elite sliding door**, state if is to be XO, or OX as viewed from the outside - "x" indicates sliding leaf

- Primador exclusive range.
- Glazed with 5mm Toughened Safety glass but is also available in 6.38 laminated glass.
- Manufactured with stainless steel D pull handle and hook lock with key.
- Centre stopper on all doors.
- This range is not reversible like the standard patio door range due to the locking mechanism and needs to be specified OX or XO upon order.



KITS AVAILABLE IN 2500mm HEIGHT

VISTA FOLD SLIDING FOLDING DOOR

available in natural
powder coated: bronze | white | charcoal
other colours (on request)

width	height
1790	2090
1790	2390
2090	2090
2090	2390
2390	2090
2390	2390
2690	2090
2690	2390
2990	2090
2990	2390



width	height
3590	2090
3590	2390
4190	2090
4190	2390
4790	2090
4790	2390
5390	2090
5390	2390
5990	2090
5990	2390



all panels glazed with Intruderprufe® glass

- Full Stainless steel rod running through each item to strengthen product.
- All joints are riveted and roll bolts should be used to do installation.
- Doors manufactured on request and according to customers specifications whether the door must stack to the left or right hand and stack on the inside or outside.
- Assembled with Flush Pull Handles.



HINGE DOOR

available in natural
powder coated: bronze | white | charcoal
other colours (on request)



all panels glazed with toughened safety glass

- Fitted with a Cisa aluminium slimline handle.
- Manufactured standard with 5mm toughened safety glass but can be supplied with 6.38 laminated glass on request.
- These doors are manufactured to customer's specifications of open in or out, handle left or right.
- Also available in double opening hinged doors.
- These doors always measured and specified, viewed from the outside.
- Side Lights can be added.

890	2090
1490	2090
1790	2090
890	2090
1490	2090
1790	2090

General Information

- Because "X" indicates a sliding leaf, always remember to state whether the sliding doors are to be "XO" or "OX" when viewed from the outside.
- When ordering patio doors, aluminium doors and windows, the 1/175th span rule should always be top of mind. This rule governs the flexibility of an aluminium window, patio door, shop front, etc, and states that all aluminium products must be designed to ensure that the deflection, positive or negative, perpendicular to the pane of glass is never to exceed 1/175th of the length of the glass edge.
- If fly screens are required, these will be supplied with the correct frame head and cill, as flyscreens do not generally fit standard patio head- and cill frames.
- Custom sized doors and burglar bars can be supplied on request.
- Products and technical specifications are subject to change without prior notice.
- Intruderprufe®** is a laminated safety glass and a registered trademark of the PG Group.

Abbreviations

- TSG = Toughened Safety Glass
- AAAMSA = Association of Architectural Aluminium Manufacturers of South Africa.

Colours



other colours on request

Deflection Law

